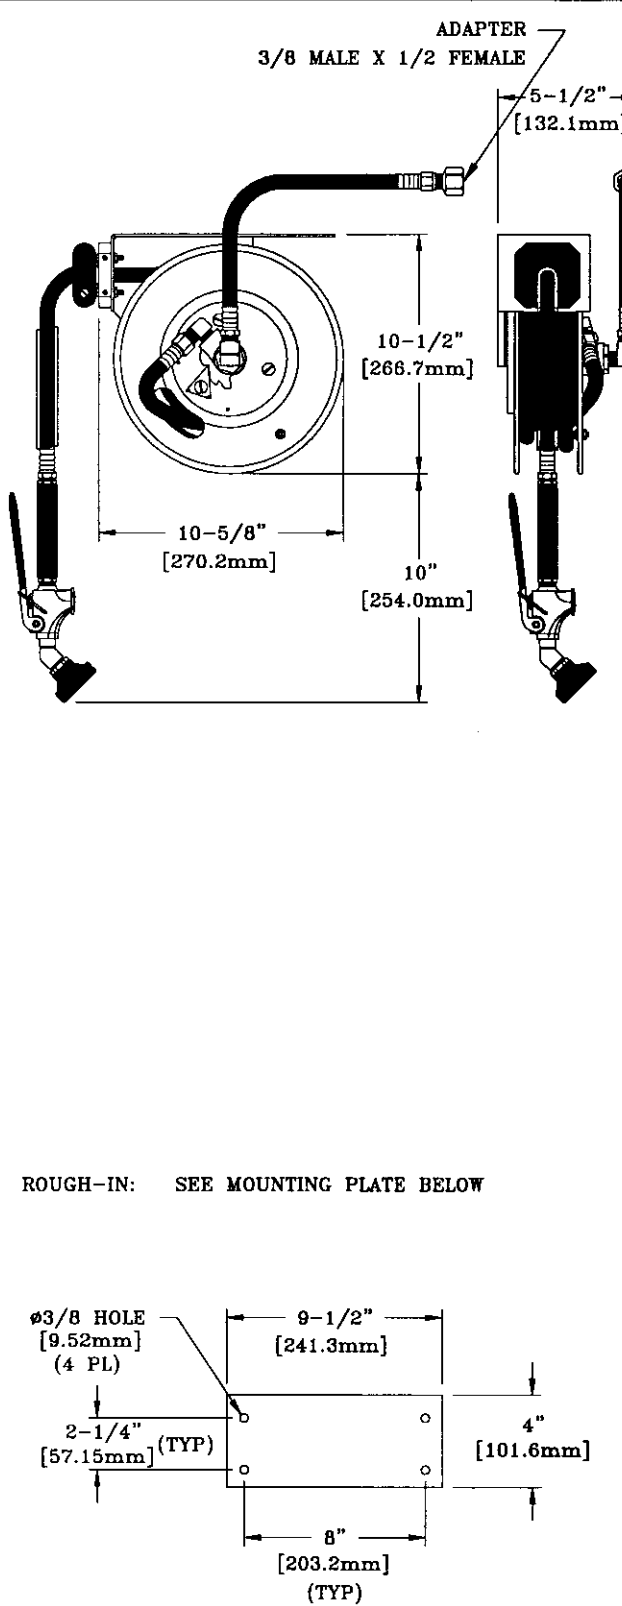



# FISHER

SPEC. 2984 REV."A"

<p><b>JOB NAME:</b></p>	<p><b>QUANTITY:</b></p>	<p><b>ITEM NO.:</b></p>
<p><b>PRODUCT NAME:</b> <b>REEL RINSE UNDER COUNTER MOUNT</b></p>		
<p><input type="checkbox"/> _____ SPECIAL CONFIGURATION (CHECK BASE MODEL AND OPTIONS)</p> <p><b>MODEL:</b> <input type="checkbox"/> 2984</p>		
<p><b>OPTIONS OR MODIFICATIONS:</b></p> <p><input type="checkbox"/> BRUSH <input type="checkbox"/> OTHER _____</p>		
<p><b>FEATURES:</b></p> <p><b>REEL</b></p> <ul style="list-style-type: none"> <li>* SELF LOCKING</li> <li>* EXPOSED</li> </ul> <p><b>HOSE</b></p> <ul style="list-style-type: none"> <li>* 12' LENGTH REEL HOSE</li> <li>* 19" LENGTH INLET HOSE</li> <li>* 3 PLY FIBER REINFORCED RUBBER HOSE</li> <li>* ADJUSTABLE BALL STOP</li> </ul> <p><b>STANDARD SPRAY VALVE</b></p> <ul style="list-style-type: none"> <li>* NOZZLE THREADED INTO VALVE</li> <li>* 2.65 GPM AT 80 PSI</li> <li>* SHOWER SPRAY PATTERN</li> </ul> <p><b>RECOMMENDED SETTINGS</b></p> <ul style="list-style-type: none"> <li>* 110°F AT 80 PSI</li> </ul> <p><b>SYSTEM LIMITS</b></p> <ul style="list-style-type: none"> <li>* TEMP: 40°F MIN. TO 140°F MAX.</li> <li>* PRESSURE 200 PSI MAX. STATIC</li> </ul> <p><b>SHIPPING WEIGHT</b></p> <ul style="list-style-type: none"> <li>* 13.0 LBS</li> </ul>		
<p><b>ROUGH-IN: SEE MOUNTING PLATE BELOW</b></p>  <p>The main drawing shows a side view and a top view of the unit. Dimensions include: 5-1/2" [132.1mm] for the top inlet hose connection; 10-1/2" [266.7mm] for the height from the counter to the top of the reel; 10-5/8" [270.2mm] for the width of the reel housing; 10" [254.0mm] for the height from the counter to the bottom of the spray valve; and 8" [203.2mm] (TYP) for the width of the mounting plate. The mounting plate has a 9-1/2" [241.3mm] length and a 4" [101.6mm] height. It features four 3/8" [9.52mm] holes, with two spaced 2-1/4" [57.15mm] (TYP) from the left edge.</p>		
<p> ANSI/A112.18.1M</p>		